


Zipcord 2.0 mm LSZH Multi-mode 50/125 Fiber Cable

光纖線

PART NO. :

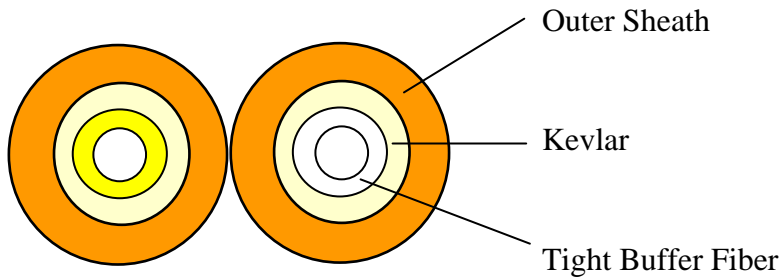

Specification

Inner Fiber	Corning fiber
Fiber types	MMF: 50/125
Bandwidth range	@850 >400 MHz - Km @1300 >600 MHz - Km
Fiber count	2C
Tight Buffer Diameter	$0.9 \leq 0.05$ mm
Cable Diameter	$2.0 * 4.0 \leq 0.1$ mm
Outer sheath	LSZH
Sheath Color	Orange
Maximum Tensile Load	500N , Short Term 300N , Long Term
Maximum Crush Radius	750 N/cm
Maximum Impact Radius	1000 cycles
Minimum Bending Radius	45mm , Load 30mm , Unload
Attenuation	@850nm ≤ 3.5 dB/Km @1300nm ≤ 1.0 dB/Km
Cable Length	1 Km
Cable weight	≤ 14 Kgs
Storage, installation, operating temperature	-40~+75°C

Order

ZP-20MM50LSZH