


Zipcord 3.0 mm Multi-mode 50/125 Fiber Cable

光纖線

PART NO. :

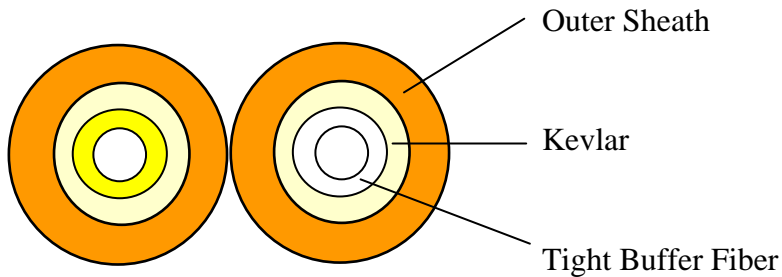

Specification

Inner Fiber	Corning fiber
Fiber types	MMF: 50/125
Bandwidth range	@850 >400 MHz - Km @1300 >600 MHz - Km
Fiber count	2C
Tight Buffer Diameter	$0.9 \leq 0.05$ mm
Cable Diameter	$2.9 \times 6.0 \leq 0.1$ mm
Outer sheath	OFNR
Sheath Color	Orange
Maximum Tensile Load	500N , Short Term 300N , Long Term
Maximum Crush Radius	750 N/cm
Maximum Impact Radius	1000 cycles
Minimum Bending Radius	45mm , Load 30mm , Unload
Attenuation	@850nm ≤ 3.5 dB/Km @1300nm ≤ 1.0 dB/Km
Cable Length	2 Km
Cable weight	≤ 32 Kgs
Storage, installation, operating temperature	-40~+75°C
Packing Dimension	$\phi 430 \times 500$ mm
Packing Weight	35 Kgs

Wood Axle :

Fumigation

Cable Printed :

Plus CORNING 50/125 Optical Fiber OFNR (UL) c(UL) E227931 (F. RoHS)
MM/YY 0000M

Order

ZP-30MM50OFNR

