

SC CONNECTOR

光纖連接器零件

PART NO. :



Specification

		SM	MM
Insertion Loss	Premium UPC	0.08dB typical	0.15dB
	Premium APC	0.10dB typical	
	Standard connector	0.12dB typical	0.20dB
Return Loss		≥ 55dB typical (PC) ≥ 68dB typical (APC)	
Durability		< 0.1dB typical Change , 500 matings	
Operating Temperature		-40°C to +75°C	
Ferrule Hole Sizes		125.5µm +1/-0, Concentricity: ≤ 1µm	127µm (MM)

Order

SC- **A** **B** **C** **D** **E** - 300

A Connector **B** Ferrule **C** Housing **D** Boot Type **E** Boot Color

1 : Pre-Assembled **1** : SM **1** : Blue **1** : 3.0 mm cable standard **1** : Blue **4** : Yellow
2 : Unassembled **2** : MM **2** : Black **2** : 2.0 mm cable standard **2** : Black **5** : Beige
3 : Beige **3** : 0.9 mm fiber boot **3** : Red

ASC- **A** **B** **C** **D** **E** - 300


A Connector **B** Ferrule **C** Housing **D** Boot Type **E** Boot Color

1 : Pre-Assembled **1** : Cone **1** : Grenn **1** : 3.0 mm cable standard **1** : Grenn
2 : Unassembled **2** : Step **2** : 2.0 mm cable standard
3 : 8° Pre-Angled **3** : 0.9 mm fiber boot

SC- **A** **B** - 350

A Duplex Clip **B** Duplex Clip Color

1 : Type 1 **1** : Blue **4** : Green
2 : Type 2 **2** : Black **5** : Beige
3 : Red

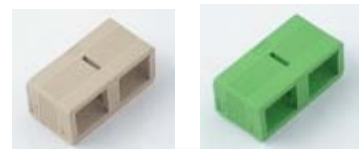

Type 2

Type 1

SC CONNECTOR

光纖連接器零件

PART NO. :

