


MTRJ CONNECTOR

光纖連接器零件

PART NO. :

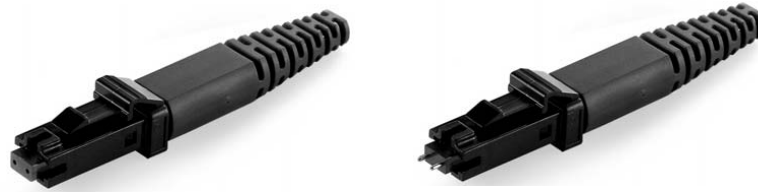

Specification

	SM	MM
Insertion Loss	0.2dB typical	0.25dB
Return Loss	≥45dB typical	
Durability	< 0.1dB typical Change , 500 matings	
Operating Temperature	-40°C to +75°C	

Order

MTRJ- **A** **B** **C** **D** **E** - 300

A
Connector

B
Ferrule

C
Type

D
Boot Type

E
Boot Color

1 : Pre-Assembled

1 : SM

1 : Female

1 : 3.0 mm cable Round

1 : Black

2 : Unassembled

2 : MM

2 : Male

2 : 1.8 mm duplex zip cable

3 : 2.0 mm duplex zip cable

MTRJ CONNECTOR

光纖連接器零件

PART NO. :

