


# MPO CONNECTOR

光纖連接器零件

PART NO. :

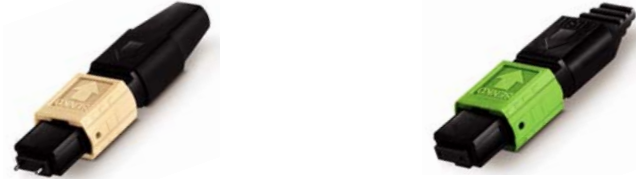

## Specification

		SM Low Loss	SM	MM
Insertion Loss	all fibers	0.1dB typical	0.25dB	0.20dB
	single fiber (max.)	0.35dB typical	0.75dB	0.50dB
Return Loss		≥55dB (8° angle polish)		≥25dB
Durability		< 0.3dB typical Change , 500 matings		
Operating Temperature		-40°C to +75°C		
Ferrule Holes		12		

## Order

MPO- A B C D E

**A**  
Connector

**B**  
Ferrule

**C**  
Housing

**D**  
Boot Type

**E**  
Hook Color

**1** : MPO Femal

**1** : SM

**1** : Black

**1** : Ribbon fiber

**1** : Grenn (SM)

**2** : MPO Male

**2** : MM

**2** : Ruggedized cable

**2** : Beige (MM 62.5/125)

**3** : Low Loss

**3** : Round cable

**3** : Yellow (Low Loss)

**4** : Aqua (OM3 50/125)