


SC ADAPTOR

SC 适配器

PART NO. :

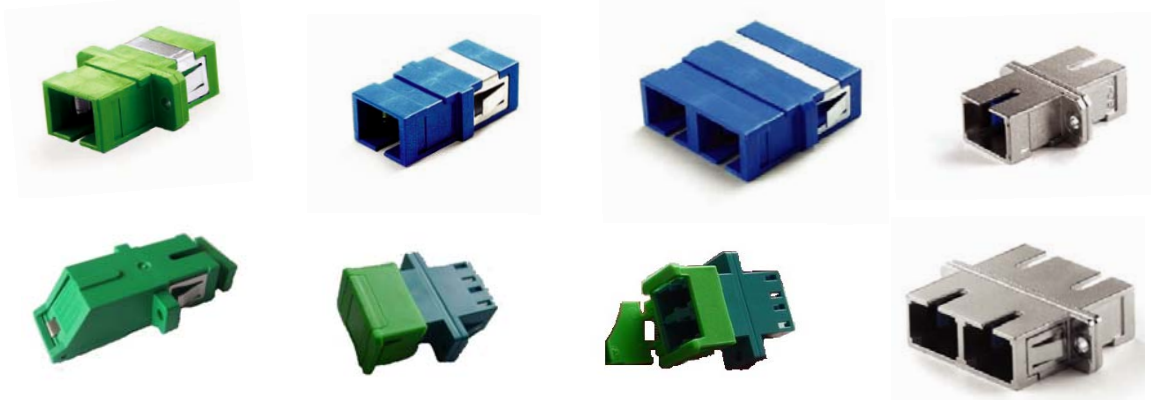

Specification

| | | SM | MM |
|-----------------------|-----------|--------------------------------------|-------|
| Insertion Loss | Zr Sleeve | 0.2dB typical | 0.3dB |
| | Pb Sleeve | 0.3dB typical | 0.4dB |
| Durability | | < 0.2dB typical Change , 500 matings | |
| Withdrawal Force | | 200- 600 gf (2.0-5.9N) | |
| Operating Temperature | | -40°C to +75°C | |

Order

Plastic Housing

SCP- **A** **B** **C** **D** **E** **F** -400

A Flange **B** Port **C** Color **D** Sleeve **E** Hook Material **F** Shutter

- 1** : With Frange **1** : Simplex **1** : Blue **1** : Zirconia **1** : PBT (Blue) **1** : N/A
- 2** : Without Frange **2** : Duplex **2** : Green **2** : Phosphor Bronze **2** : PEI (Brown) **2** : Internal
- 3** : External

Metal Housing

SCM- **A** **B** **C** **D** -400

A Flange **B** Port **C** Sleeve **D** Hook Material

- 1** : With Frange **1** : Simplex **1** : Zirconia **1** : PBT (Blue)
- 2** : Duplex **2** : Phosphor Bronze **2** : PEI (Brown)